



## NC3MXX-EMC

3 pole male EMC-XLR cable connector


The EMC-XLR Series is a specifically designed version of the XX series to give enhanced RF screening for critical applications in live performance and recording where there are particular problems with radio transmission or mobile phones. The design guarantees a continuous RF shield connection from the cable to the chassis connector housing via a circular capacitor around the cable shield. The circular capacitors act as high-pass filter with a cut-off frequency around 10 MHz.

An EMI suppression ferrite bead with 24 Ohm at 1 MHz between pin 1 and the cable screen provides a low-pass filter for improved RF rejection.


### Features & Benefits

- 3 pole male and female XLR cable connector with integrated capacitive shield to shell connection
- Cable shield - Pin 1 connection includes EMI suppression bead to block high frequencies
- Rugged zinc diecast shell, long lasting and durable
- Boot with rubber gland gives high protection against bending stresses
- Circular capacitor around the cable shield enables low-inductive shield connection to connector housing
- Avoid ground loops as there is no LF-shield connection to ground
- Chuck type strain relief system for secure clamping of cables

①

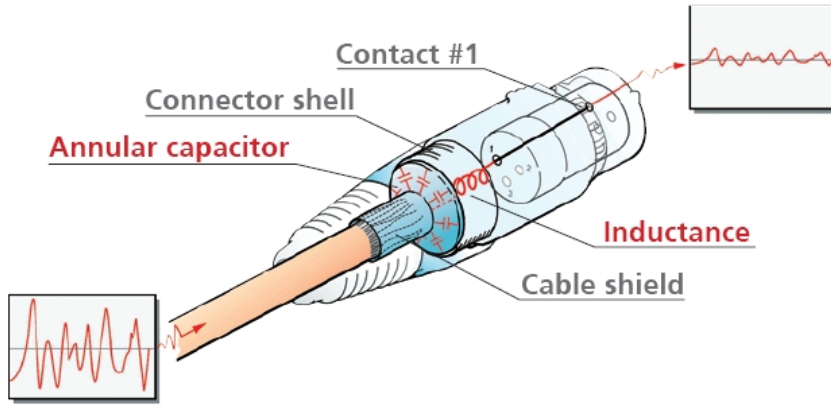

- ① Design guarantees a continuous RF-shield connection but avoids ground loops (no LF-shield connection)
- ② Circular capacitor enables low-inductive shield connection to connector housing
- ③ Cable shield - PIN 1 connection includes EMI suppression bead (blocks high frequencies)

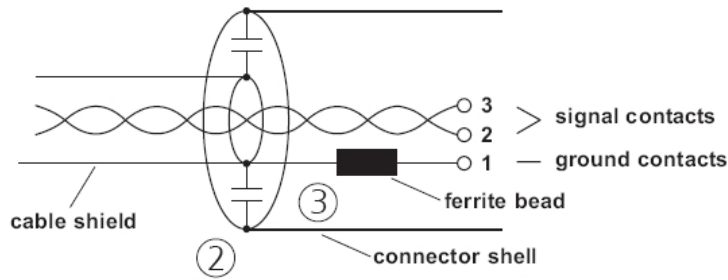

## Technical Information

Product	
<b>Title</b>	NC3MXX-EMC
<b>Connection Type</b>	XLR
<b>Gender</b>	male

Electrical	
<b>Capacitance between contacts</b>	$\leq 4$ pF
<b>Contact resistance</b>	$\leq 3$ m $\Omega$
<b>Dielectric strength</b>	1,5 kVdc
<b>Insulation resistance</b>	$> 10$ G $\Omega$ (initial)
<b>Rated current per contact</b>	5 A
<b>Rated voltage</b>	$< 50$ V

Mechanical	
<b>Cable O.D.</b>	3.5 - 8.0 mm
<b>Insertion force</b>	$\leq 20$ N
<b>Withdrawal force</b>	$\leq 20$ N
<b>Lifetime</b>	$> 1000$ mating cycles
<b>Wiresize</b>	max. 0.75 mm <sup>2</sup>
<b>Wiresize</b>	max. 20 AWG
<b>Wiring</b>	Solder contacts
<b>Locking device</b>	Latch lock

Material	
<b>Boot</b>	Polyurethan
<b>Contact plating</b>	0.2 µm Au hard alloy over 2 µm Ni
<b>Contacts</b>	Brass (CuZn39Pb3)
<b>Insert</b>	Polyamide (PA 6.6 30 % GR)
<b>Locking element</b>	Zinc diecast (ZnAl4Cu1)
<b>Shell</b>	Zinc diecast (ZnAl4Cu1)
<b>Shell plating</b>	Nickel
<b>Strain relief</b>	Polyacetal (POM)

Environmental	
<b>Flammability</b>	UL 94 HB
<b>Standard compliance</b>	IEC 61076-2-103
<b>Protection class</b>	IP 40
<b>Solderability</b>	Complies with IEC 68-2-20
<b>Temperature range</b>	-30 °C to +80 °C