




**Cable O.D.: 7.0 mm**

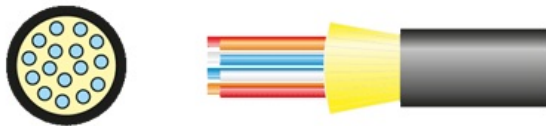

## opticalCON MTP® 16 Cable

Assembled, rugged and lightweight 16-channel mobile field cable, excellent cable retention due to aramid yarn, black PUR outer jacket, available in single mode (APC).

The opticalCON MTP® cable connector accommodates 16 optical fibers (single mode APC) based on conventional and proven MTP® connectivity protected by a ruggedized and durable all-metal housing. It features a spring loaded push-pull locking mechanism and an excellent cable retention utilizing aramid yarn. The optical connection is exceptional well protected against dirt and dust by an automatically operated sealing cover.


The cable connector comes pre-assembled and is not available as a single component. The cable is available in different lengths and is packed either in a case, on drum or airspool.

## Features & Benefits

- ✓ Ruggedized and dirt-protected 16-channel fiber optic connection system
- ✓ For point-to-point multichannel routing based on MTP® technology
- ✓ Cable connector features rugged metal housing and heavy-duty cable retention
- ✓ Spherical shutter guarantees low maintenance
- ✓ Dust and water resistant according to IP65 in mated condition
- ✓ Easy to clean, no special tools required
- ✓ Reliable Push-Pull locking mechanism

- ✓ Cable connector comes pre-assembled with a choice of mobile field cables

Cable cross section

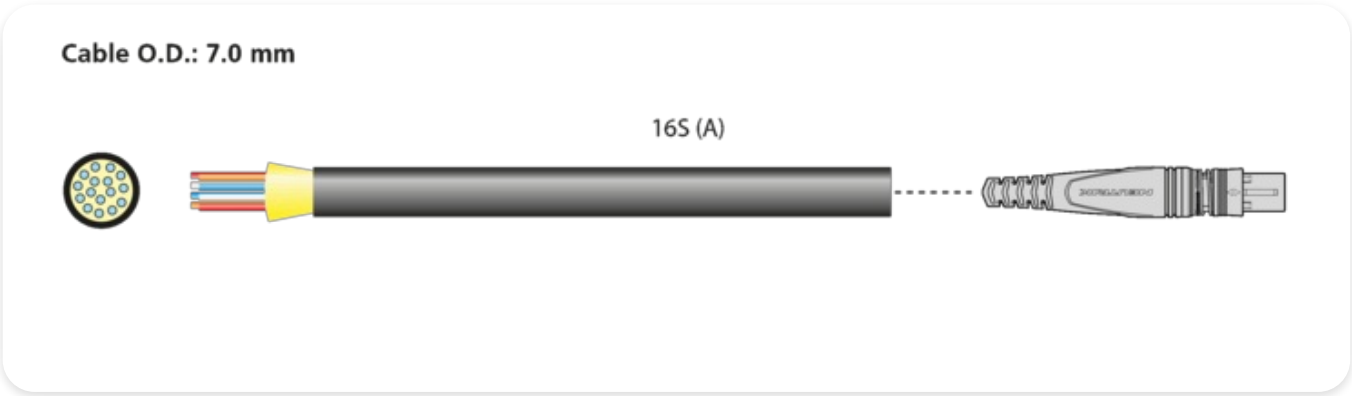

Packaging options and max. cable length

|        |  |  |  |  |  |  |  |
|--------|---|--|--|--|---|--|--|
|        | 0<br>Airs pool  | 1<br>opticalCON Case   | 2<br>Drum Schill GT310   | 3<br>Drum Schill GT380   | 4<br>Drum Schill HT582  | 5<br>Drum Schill GT450   | 6<br>Drum Schill SK4812  |
| Wide   | -   | 490 mm / 19.3"   | ø 310 mm / 12.2"   | ø 380 mm / 15.0"   | ø 580 mm / 22.0"  | ø 445 mm / 17.6"   | 518 mm / 20.4"<br>ø 460 mm / 18.1"   |
| High   | -   | 340 mm / 13.4"   | NOT<br>AVAILABLE<br>230 mm / 9.1"  | 491 mm / 19.3"   | 710 mm / 28.0"  | 555 mm / 21.8"   | 562 mm / 22.1"   |
| Depth  | -   | 150 mm / 5.9"  |  | 303 mm / 11.9"   | 271 mm / 10.6"  | 312 mm / 12.2"   | 422 mm / 16.6"   |
| Weight | -   | 1.5 kg   | 2.2 kg   | 4.7 kg   | 13.9 kg   | 5.4 kg   | 16.7 kg  |

Technical Information

| Product |                          |
|---------|--------------------------|
| Title   | opticalCON MTP® 16 Cable |

**Mechanical**

|                  |                     |
|------------------|---------------------|
| Cable retention  | > 500 N             |
| Insertion force  | < 45 N              |
| Withdrawal force | < 45 N              |
| Lifetime (typ.)  | 2'500 mating cycles |
| Locking device   | Push-Pull           |

**Material**

|               |  |
|---------------|--|
| Boot          | Rubber (EPDM)                              |
| Bushing       | ZnAl4Cu1                                   |
| Insert        | Polyamide (PA 6, PBT 30 % GR, PBT 50 % GR) |
| Shell         | Zinc diecast (ZnAl4Cu1)                    |
| Shell plating | Black chromium                             |
| Strain relief | Brass (CuZn39Pb3) + PU, Ni                 |

**Environmental**

|                   |                         |
|-------------------|-------------------------|
| Temperature range | -40 °C to +75 °C        |
| Protection class  | in mated condition IP65 |

**Optical**

|                   |             |
|-------------------|-------------|
| Insertion loss    | < 0.9 dB    |
| Optical connector | MTP® female |
| Optical wiring    | Method A    |

| Mobile cable           |                 |
|------------------------|-----------------|
| Colour                 | black, matte    |
| Core diameter          | Singlemode 9 µm |
| Cladding diameter      | 125 µm          |
| Comment                | PUR             |
| Minimal bending radius | 8.2 cm          |
| Number of fibers       | 16              |
| Cable retention        | Aramid yarn     |
| Weight                 | 43 kg/km        |
| Overall diameter       | 7.0 mm          |