




mounting hole for
4xDIN ISO 4762 M3
cylindrical head screws
stator-side

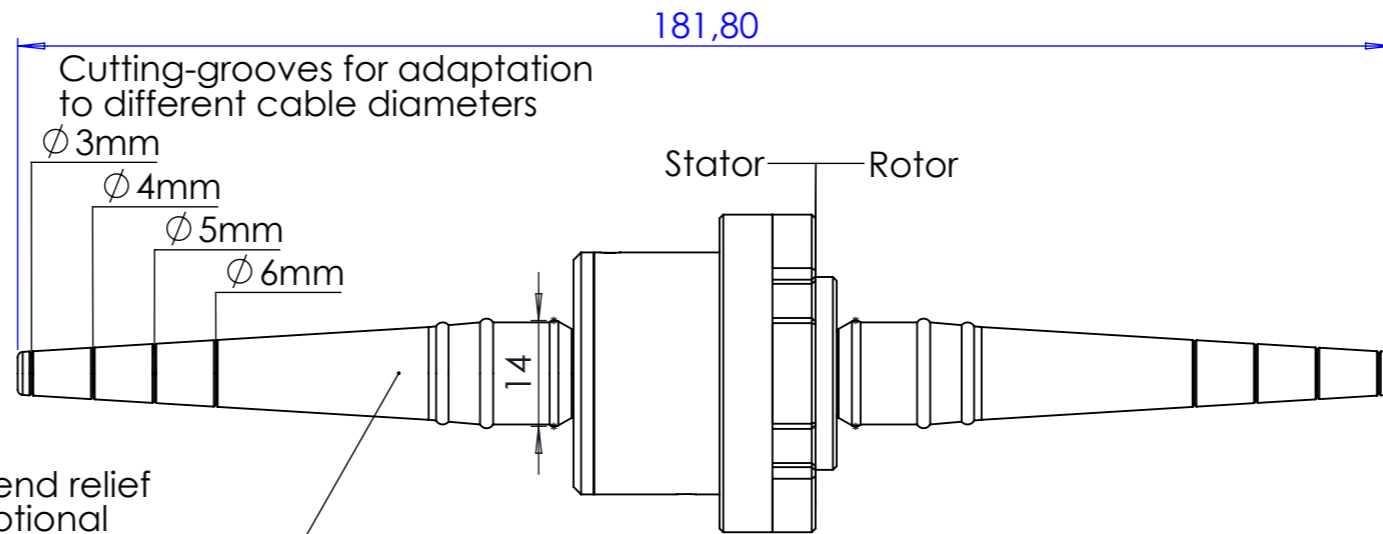

cutting-grooves for adaptation
to different cable diameters
 ϕ 3mm
 ϕ 4mm
 ϕ 5mm
 ϕ 6mm
bend relief
optional
order-no.: 1028485

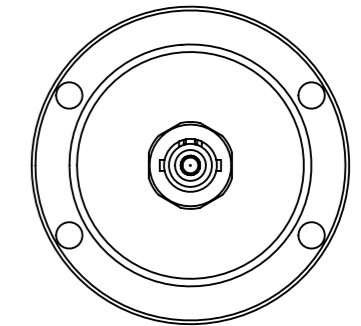


mounting hole for M3 screws
rotor-side

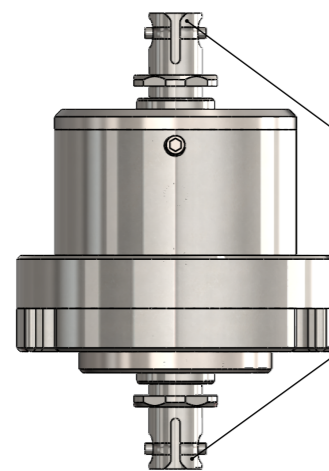


ST-Connectors

bend relief
optional
order-no.: 1028485

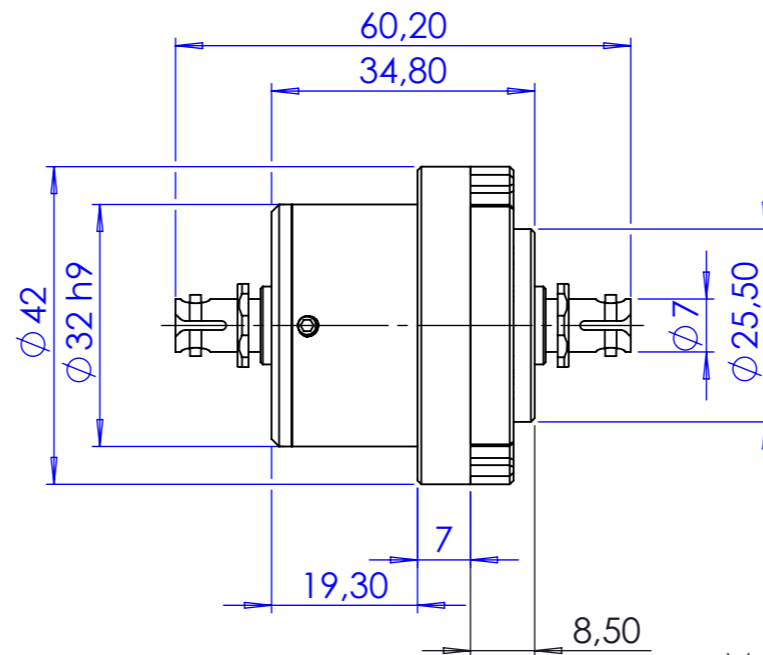

Isometry
scale 1:1

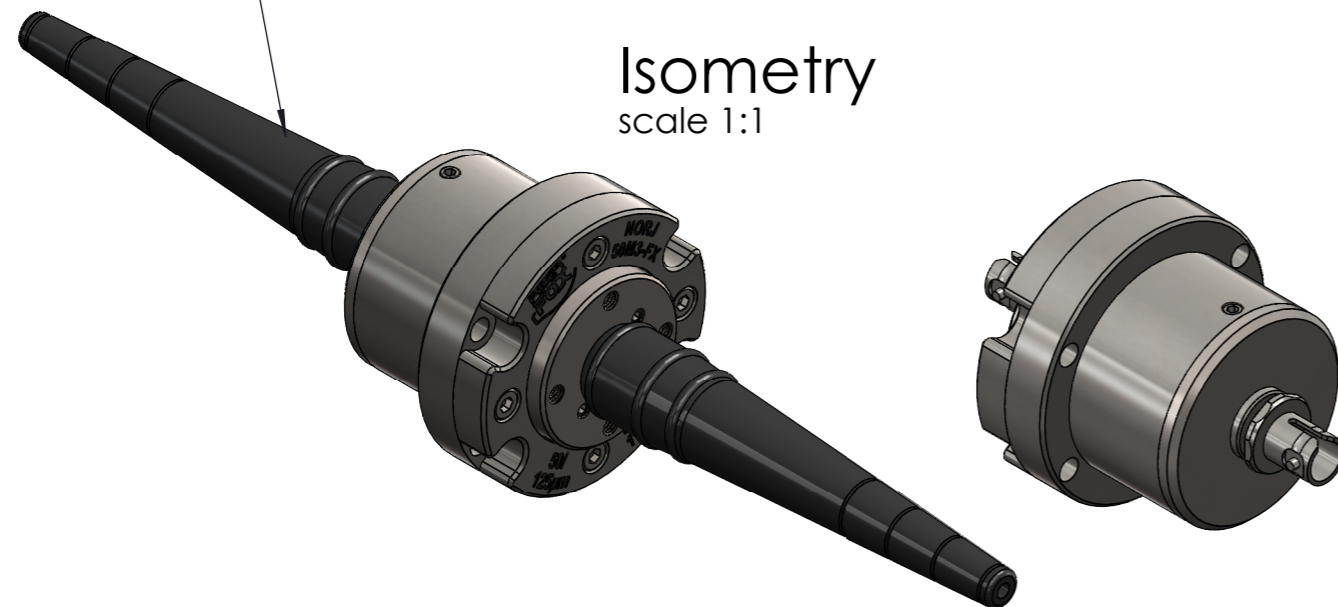

- > Multimode - 50 / 125 μ m or 62,5 / 125 μ m (27460002)
- > Material: mainly stainless steel (1.4305 X8CrNiS18-9)
- > Temperatur Range from -40°C to +80°C
- > Wavelengths from 850nm to 1310nm
- > Rotational speed up to 5500rpm max.
- > Protection class IP 66 with bend relief

Sheet Number 1/1	Projection 	Scale 1:2	Format A3	Tolerancing ISO 2768-	
g	cm ²	cm ³	Created	HeBo	18.03.2022
Material			Modified		
Material addition			Approved	DiRo	18.03.2022
Description NORJ50M3-FX FF Rotary Joint 50um D42x60 OM3 ST/ST			ECN Number		
NEUTRIK			Status		
3D Model ID 41028479	Document ID 1028479	Revision 01			