

DIGITAL AUDIO DEVICES

AUDIO DEVICES LINE I/O TO DANTE® INTERFACE





A brand of the Neutrik Group



4

DANTE®AUDIO INTERFACES





Connect your legacy audio gear to the DANTE® world. The Line I/O to DANTE® Interface is an end-of-network device. It is a breakout box which allows two channels of audio to be integrated into a DANTE® network. Simultaneously, NA-2I2O-DLINE converts a DANTE® stream into analog audio signals. Hence, it is possible to use this tiny box to feed analog audio signals into the DANTE® network while at the same time receiving a mix from another DANTE® source.

Line I/O to DANTE® Interface is designed for harsh stage conditions. It therefore features lockable chassis connectors for both the audio and network connections. For fixed installations, the rubber protection can be removed. With optional mounting brackets or a rack panel, the box can be mounted below tables, in floor boxes, or in equipment racks.

DANTE® AUDIO INTERFACES

LINE I/O TO DANTE® INTERFACE

Order No.	Description
NA-2I2O-DLINE	2 Line Input and 2 Line Output with 1 DANTE®/RJ45 Ethernet Port
NA-2I-DLINE	2 Line Input with 1 DANTE®/RJ45 Ethernet Port
NA-20-DLINE	2 Line Output with 1 DANTE®/RJ45 Ethernet Port







NA-2I2O-DLINE

NA-2I-DLINE

NA-20-DLINE

ACCESSORIES

FOR LINE I/O TO DANTE® INTERFACE




Order No.	Description
NA-TM-KIT	Trussmount kit (Kit includes 4 cross screws, 4 fixing screws, 2 safety frames, 1 yoke mount)
NA-RC	Removable rubber protection
NA-MB-KIT	Mounting brackets (Kit includes 2 brackets, 2 fixing screws, 2 torx screws and 2 spacers)
NRP1RU-2A	Rack panel






DANTE®SETUP AND APPLICATION




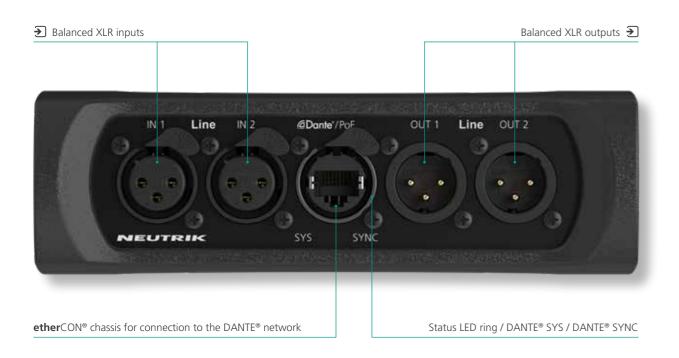

POWER SETUP

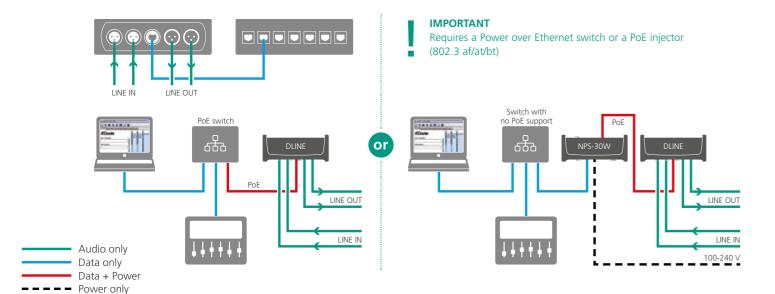


INPUT APPLICATION

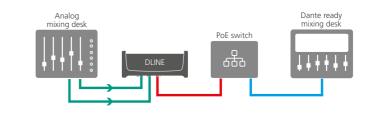

OUTPUT APPLICATION


Audio onlyData only

Data + Power

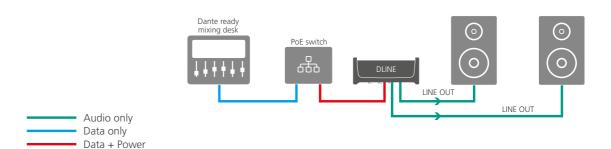

INPUT & OUTPUT APPLICATION

(MIXED MODE)

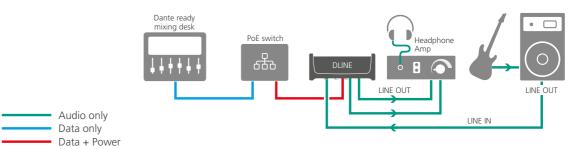







LIECHTENSTEIN (HEADQUARTERS)

Neutrik AG, Im alten Riet 143, 9494 Schaan, Liechtenstein T +423 237 24 24, F +423 232 53 93, neutrik@neutrikgroup.com



www.neutrik.com

