

## powerCON FXX cord set

Experience full compliance, unwavering reliability, and top-notch safety, all within your budget.

Neutrik Essential series Cords sets.



## Features & Benefits

- ✓ Cord sets (powerCON® FXX – Schuko E+F (m) )
- ✓ High quality rubber cables or PVC jacketed power cables
- ✓ Cables with 1.5mm<sup>2</sup> and 2.5mm<sup>2</sup> conductor cross section
- ✓ powerCON® connectors (NAC3FXXA / NAC3FXXXB), certified according to the EN60320-1

- ✓ Ruggedized powerCON® connectors with Circuit Breaking Capacity (CBC)
- ✓ IP20
- ✓ Cords sets compliant to the IEC60799
- ✓ Attractive price / value ratio

## Product safety

Electrical cables and connectors can pose risk to life and to the appliances. To guarantee the necessary level of protection. The requirements of the low voltage directive (LVD) must be met. The LVD requirements for the connector and cables are described in the EN 60320 and EN 60799 respectively. Compliance with these norms must be confirmed by CE declaration.

## Essential series power cords

Neutrik Essential series power cords stand for full standard-compliance, unwavering reliability, and top-notch safety.

**COMPLIANCE MATTERS.** The new NEUTRIK powerCON blue / grey XX series connectors proudly carry the IEC-EN 60320-1 certification, complying with all required norms and standards. You can trust that your equipment is in good hands with NEUTRIK. Full conformity of the power cord to the EU standards is confirmed by the CE declaration acc. to EN60799. The product [CE declaration](#) can be found in the Download area below.

**SAFETY FIRST.** At NEUTRIK, we prioritize your safety above all else. Our cables are rigorously tested and certified to ensure they meet the highest safety standards in the industry.

**EXPERIENCE RELIABILITY.** These cords guarantee the top-tier reliability. Embrace confidence with our ruggedized powerCON blue/grey XX connectors paired with high-quality cables.

**EUROPEAN CRAFTSMANSHIP.** Our cables are proudly produced in Europe, adhering to the highest manufacturing standards. European production guarantees precision, quality, and reliability that you can count on.


**BEST PRICE.** We prioritize high quality, unmatched safety standards, and cost efficiency!

With our in-house connectors manufacturing and state-of-the-art, costeffective power cord production site, we bring you affordable prices that redefine value for money.


## Article Variations

Article name	Details	Order code
NKPH01-MFA3-M0150	Cable: 1.5m H07RN-F3G1.5 (3x1.5mm <sup>2</sup> ); Connectors: powerCON FXXA / Schuko E+F (m) IP20	1036410
NKPH01-MFA3-M0300	Cable: 3m H07RN-F3G1.5 (3x1.5mm <sup>2</sup> ); Connectors: powerCON FXXA / Schuko E+F (m) IP20	1036411
NKPH02-MFA3-M0150	Cable: 1.5m H07RN-F3G2.5 (3x2.5mm <sup>2</sup> ); Connectors: powerCON FXXA / Schuko E+F (m) IP20	1036412
NKPH02-MFA3-M0300	Cable: 3m H07RN-F3G2.5 (3x2.5mm <sup>2</sup> ); Connectors: powerCON FXXA / Schuko E+F (m) IP20	1036413
NKPH11-MFA3-M0150	Cable: 1.5m H05VV-F3G1.5 (3x1.5mm <sup>2</sup> ); Connectors: powerCON FXXA / Schuko E+F (m) IP20	1036420
NKPH11-MFA3-M0300	Cable: 3m H05VV-F3G1.5 (3x1.5mm <sup>2</sup> ); Connectors: powerCON FXXA / Schuko E+F (m) IP20	1036421

## CORD SET, RUBBER CABLE (NKPH01/02-MFA3)

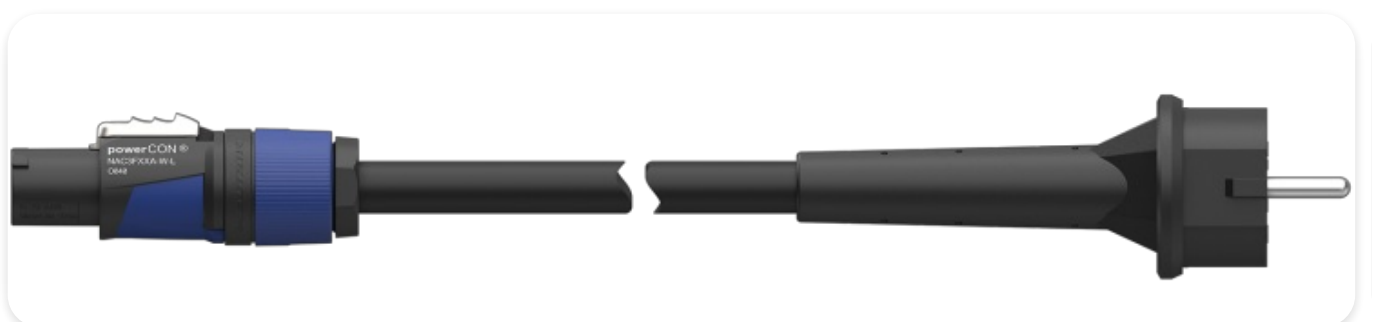

CORD SET, PVC CABLE (NKPH11-MFA3)

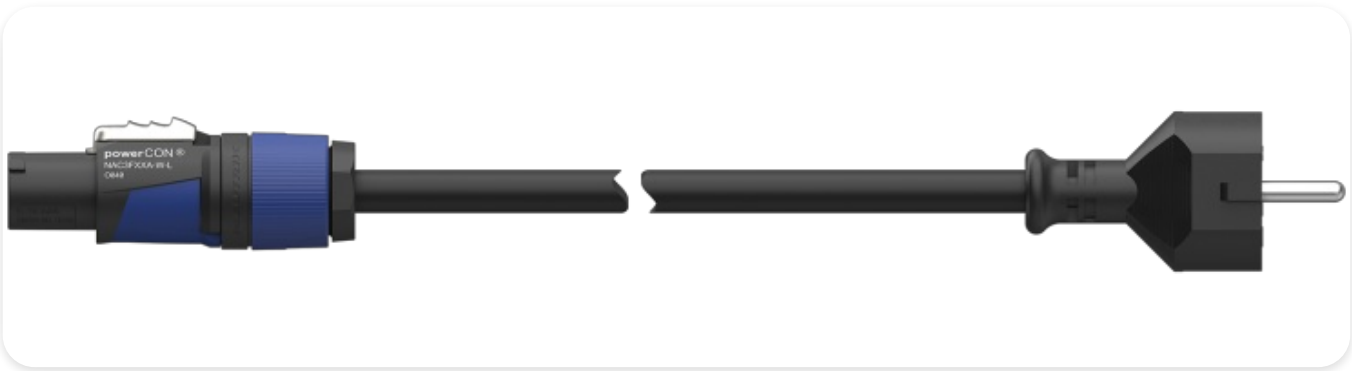

Partnumber Breakdown

**N K P**

**NEUTRIK powerCON TRUE1 Cable**

**Country Code**

H ..... Harmonisiert

**CABLE TYPE**

01 ..... H07RN-F3 (3 x 1.5 mm²)  
02 ..... H07RN-F3 (3 x 2.5 mm²)  
03 ..... H07RN-F3 (3 x 1.5 mm²) NEXANS TITANEX®  
04 ..... H07RN-F3 (3 x 2.5 mm²) NEXANS TITANEX®  
11 ..... H05VV-F (3 x 1.5 mm²)

**TERMINATION 1. SIDE**

A2 ..... Assembled powerCON TRUE1 male  
A4 ..... Assembled powerCON FXXB (grey)  
MF ..... Molded Schuko

**H 0 4 - A 2 A 1 - M 2 0 0 0**

**LENGTH**

0010 ..... 0.1 m  
0100 ..... 1.0 m  
9990 ..... 99.9 m

**Unit of Length**

M ..... Meter  
F ..... Feet

**TERMINATION 2. SIDE**

A1 ..... Assembled powerCON TRUE1 female  
A3 ..... Assembled powerCON FXXA (blue)  
MF ..... Molded Schuko

Mating scenario

